


AQUAFOG 3300™

[Download the Aquafog 3300 User Manual](#)

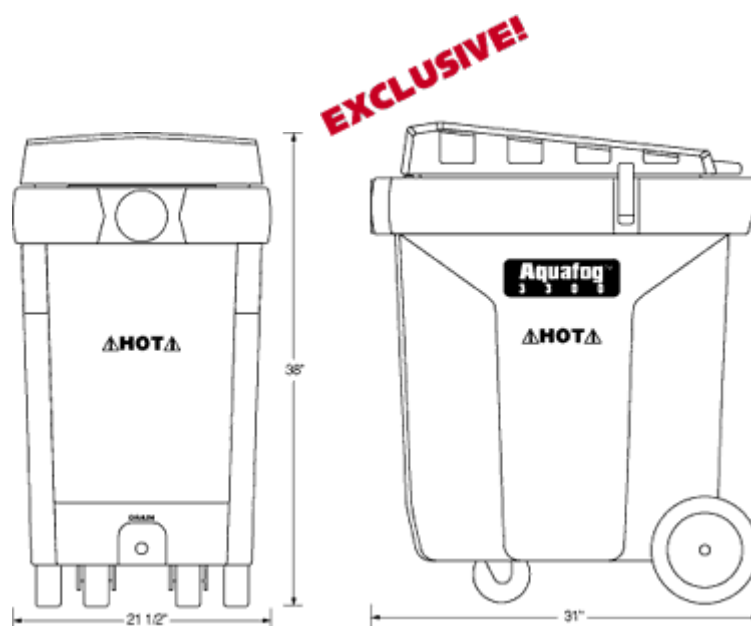

SPECIFICATIONS	
Tank	
Material	High temperature plastic polymer
Dimensions	21 1/2" x 31" x 38" (including casters) (546mm x 787mm x 965mm)
Water capacity	28 gallons (106 litres)
Ice capacity	75 lbs. (34 kg.)
Casters	3 1/2" (88.9mm) swivel front, 8" (203mm) fixed rear
Hose vent	4" (101.6mm) molded into tank
Fill Door	20" x 30" (508mm x 762mm)
Weight empty	115 lbs. (52kg.)
Shipping weight	130 lbs. (59kg.)
Weight fully loaded	455 lbs. (208.19kg.)
Plumbing	
Pump	Stainless steel 10GPM (37.85 litres/min.)
Fittings	All stainless, brass or high temperature plastic
Electrical	
Voltage	120v, 230v available
Heating elements	120v 1650 watt; 230v 3000 watt (two) screw in
Thermostat	Adjustable automatic control (100°F-160°F) (38°C-71°C)
Overtemperature:	175°F (79°C) cutout, manual reset
Low water cutout	Turns off heaters when water is low
Blower	240 CFM axial (6.799 CMM)
Circuit breakers-Type	20 amp on heating element 2 amp (lighted) on fan & pump

SPECIFICATIONS SUBJECT TO CHANGE